



GTB33

TOWABLE BOOM LIFTS



39' 4" Max Working Height




19' 0" Max Horizontal Outreach



4,190 lbs Vehicle Weight



20' 8" x 5' 7" x 6' 11" Dimension(LxWxH)



Feature

1. Easy Towing:

Effortlessly towed by a pickup or SUV, eliminating heavy hauling costs.

2. Compact & Access:

Ultra-narrow stowed width fits through 32-inch doors and tight aisles.

3. Intuitive Controls:

Simple, precise control system for effortless platform positioning.

4. Advanced Safety:

Outrigger interlocks, anti-tipping, and overload alarms prevent rollovers.

5. Auto-Leveling Outriggers:

One-touch automatic leveling maximizes jobsite efficiency.

6. Dual-Power Options:

Flexible configurations including Gasoline, Diesel, AC, and Battery.

7. Basket Leveling Switch:



Quick-adjust switch for easy and precise platform alignment.

8. Transport Lock System:

Secures the boom and basket to eliminate sway during transit.



Working Range Diagram

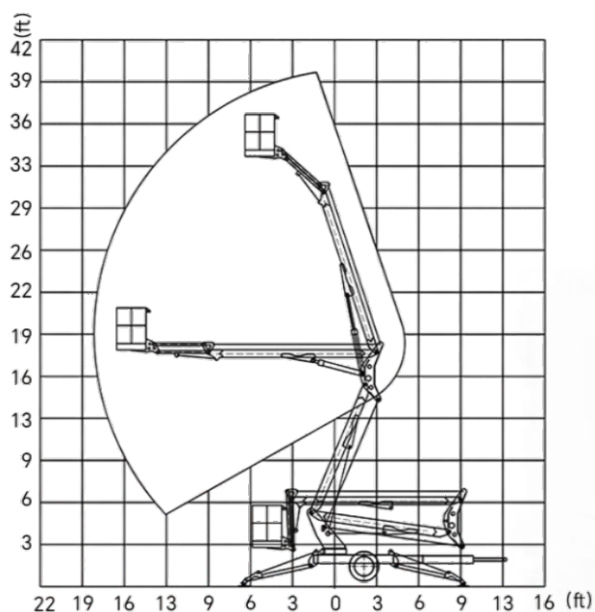

GTB33 Towable Boom Lift

Technical Specifications

Technical Data

Max Working Height	39' 4"
Max Platform Height	32' 10"
Max Horizontal Outreach	19' 0"
Rotation Angle	359° Non-continuous
Platform Dimensions	35.4" x 27.6" x 43.3"
Max Platform Capacity	440 lbs

Technical Parameter

Dimension(L x W x H)	20' 8" x 5' 7" x 6' 11"
Overall Outrigger Footprint	13' 9" x 14' 9"
Max Towing Speed	68 mph
Weight	4,189 lbs

Power Options

Engine (diesel)	Kubota Diesel Engine
Engine (gasoline)	B&S Gasoline Engine
Electric Motor	110V / 220V AC
Battery	Lead-Acid /Lithium-ion
Manual Emergency Pump	Manual Operation

Safety Devices

- Automatic Leveling Control
- Sensor of Outrigger
- Alarm Device
- Emergency Stop Button
- Travel / Outrigger /Boom Three-Way Interlock System

Optional Devices

- 360°Continuous Rotation
- 160°Platform Rotation Angle
- Assist Drive System
- Dual-Power