



GTB40

TOWABLE BOOM LIFTS



45' 11" Max Working Height



21' 4" Max Horizontal Outreach



4,190 lbs Vehicle Weight



20.3' x 5.6' x 7.2' Dimension(L x W x H)



Feature

1. Easy Towing:

Effortlessly towed by a pickup or SUV, saving you professional hauling costs and time.

2. Compact & Access:

Ultra-narrow stowed width fits through standard doors and tight aisles.

3. Intuitive Controls:

Simple, precise control system for effortless and accurate platform positioning.

4. Transport Lock:

Secures the boom and basket to eliminate sway during transit.

5. Advanced Safety:

Anti-tipping, outrigger interlocks, and overload alarms prevent rollover accidents.

6. Auto-Leveling:

One-touch automatic outrigger leveling maximizes jobsite setup efficiency.

7. Dual-Power Options:


Flexible power configurations including Gasoline, Diesel, AC, and Battery.

8. Easy Basket Adjust:

Dedicated leveling switch makes platform alignment fast and effortless.



Working Range Diagram

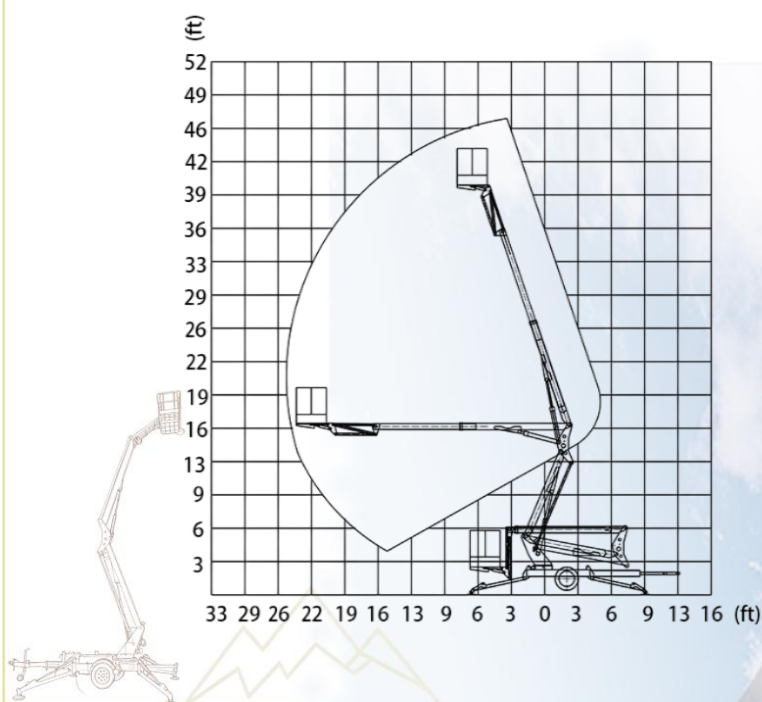

GTB40 Towable Boom Lift

Technical Specifications

Technical Data Technical Parameter

Max Working Height	45' 11"
Max Platform Height	39' 4"
Max Horizontal Outreach	21' 4"
Rotation Angle	359° Non-continuous
Platform Dimensions	35.4" x 27.6" x 43.3"
Max Platform Capacity	440 lbs

Dimension(L x W x H)	20.3'x5.6'x7.2'
Overall Outrigger Footprint	13' 9" x 14' 9"
Max Towing Speed	68 mph
Weight	4,190lbs

Power Options

Engine (diesel)	Kubota Diesel Engine
Engine (gasoline)	B&S Gasoline Engine
Electric Motor	110V / 220V AC
Battery	Lead-Acid /Lithium-ion
Manual Emergency Pump	Manual Operation

Safety Devices

- **Automatic Leveling Control**
- **Sensor of Outrigger**
- **Alarm Device**
- **Emergency Stop Button**
- **Travel / Outrigger / Boom Three-Way Interlock System**

Optional Devices

- **360°Continuous Rotation**
- **160°Platform Rotation Angle**
- **Assist Drive System**
- **Dual-Power**

