



GTB45 TOWABLE BOOM LIFTS

Articulating Boom with A Telescopic



52' 6" Max Working Height




27' 11" Max Horizontal Outreach



5,071 lbs Vehicle Weight



18' 1" x 5' 7" x 6' 11" Dimension(LxWxH)



Feature

1. Articulating boom with a telescopic:

Excellent up-and-over clearance for navigating obstacles

Articulating Lower Boom:

Uses heavy-duty linkages to provide exceptional **up-and-over** clearance, easily bypassing fences, guardrails, and landscaping.

Telescopic Upper Boom:

Extends linearly for precise **horizontal outreach** and smooth, direct positioning to the target work area.

2. Easy Towing:

Effortlessly towed by a pickup or SUV, saving you professional hauling costs and time.

3. Compact & Access:

Ultra-narrow stowed width fits through standard doors and tight aisles.

4. Advanced Safety:


Anti-tipping, outrigger interlocks, and overload alarms prevent rollover accidents.

5. Auto-Leveling:


One-touch automatic outrigger leveling maximizes jobsite setup efficiency.

6. Dual-Power Options:

Flexible power configurations including Gasoline, Diesel, AC, and Battery.

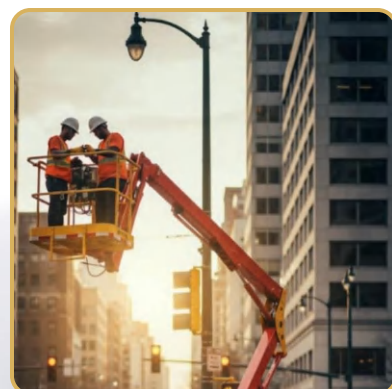

Working Range Diagram

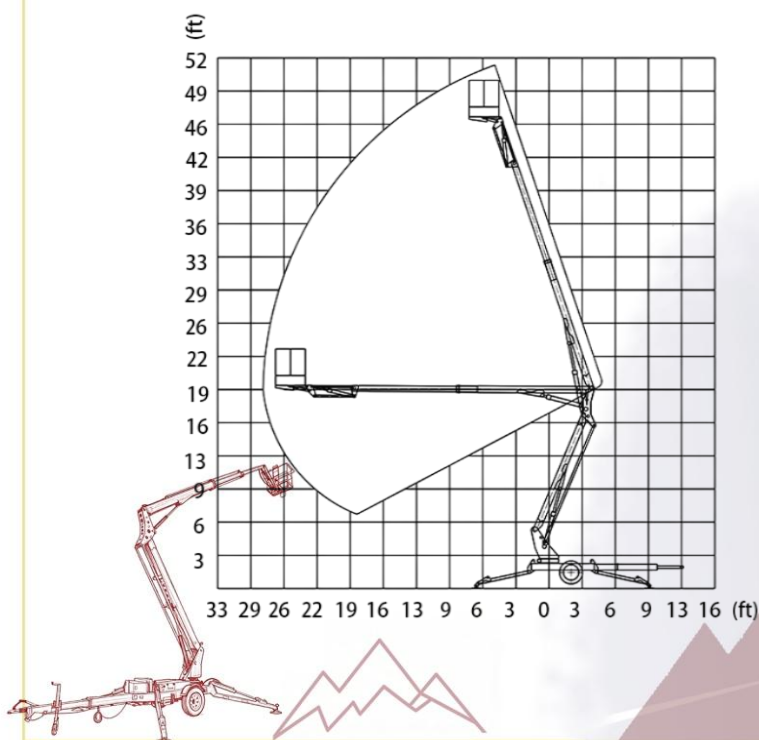

GTB45 Towable Boom Lift

Technical Specifications

Technical Data

Max Working Height
Max Platform Height
Max Horizontal Outreach
Rotation Angle
Platform Dimensions
Max Platform Capacity

Technical Parameter

52' 6"
45' 11"
27' 11"
359° Non-continuous
35.4" x 27.6" x 43.3"
440 lbs

Dimension(L x W x H)
Overall Outrigger Footprint
Max Towing Speed
Weight

18' 1" x 5' 7" x 6' 11"
13' 9" x 14' 9"
68 mph
5,071bs

Power Options

Engine (diesel)
Engine (gasoline)
Electric Motor
Battery
Manual Emergency Pump

Kubota Diesel Engine
B&S Gasoline Engine
110V / 220V AC
Lead-Acid /Lithium-ion
Manual Operation

Safety Devices

- Automatic Leveling Control
- Sensor of Outrigger
- Alarm Device
- Emergency Stop Button
- Travel / Outrigger / Boom Three-Way Interlock System

Optional Devices

- 360°Continuous Rotation
- 160°Platform Rotation Angle
- Assist Drive System
- Dual-Power