



GTB52 TOWABLE BOOM LIFTS

Articulating Boom with A Telescopic



59' 1" Max Working Height




34' 5" Max Horizontal Outreach



5,732 lbs Vehicle Weight



18' 8" x 5' 7" x 7' 3" Dimension(LxWxH)



Feature

1. Articulating boom with a telescopic:

Excellent up-and-over clearance for navigating obstacles

Articulating Lower Boom:

Uses heavy-duty linkages to provide exceptional **up-and-over** clearance, easily bypassing fences, guardrails, and landscaping.

Telescopic Upper Boom:

Extends linearly for precise **horizontal outreach** and smooth, direct positioning to the target work area.

2. Easy Towing:

Effortlessly towed by a pickup or SUV, saving you professional hauling costs and time.

3. Compact & Access:

Ultra-narrow stowed width fits through standard doors and tight aisles.

4. Advanced Safety:

Anti-tipping, outrigger interlocks, and overload alarms prevent rollover accidents.

5. Auto-Leveling:


One-touch automatic outrigger leveling maximizes jobsite setup efficiency.

6. Dual-Power Options:

Flexible power configurations including Gasoline, Diesel, AC, and Battery.



Working Range Diagram

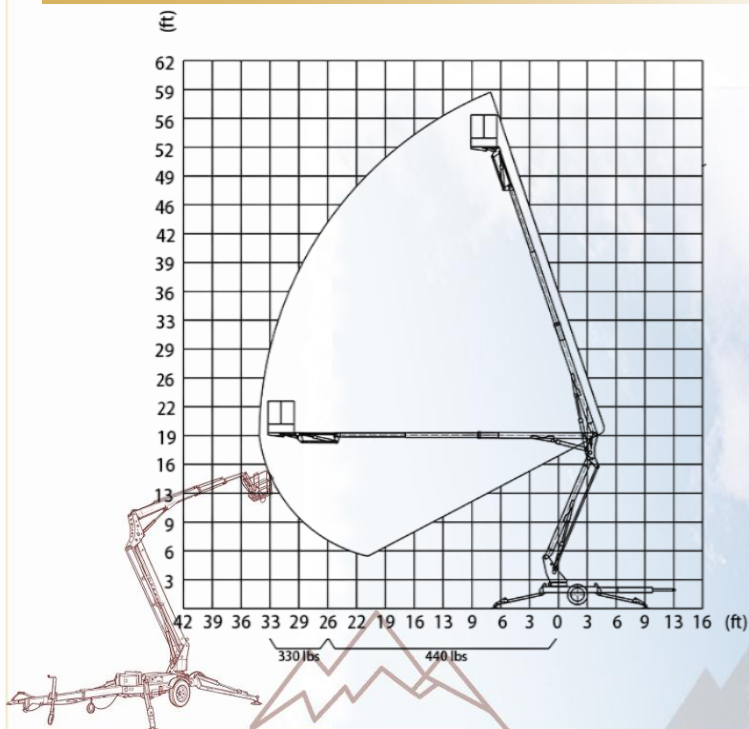

GTB52 Towable Boom Lift

Technical Specifications

Technical Data

Technical Parameter

Max Working Height	59' 1"
Max Platform Height	52' 6"
Max Horizontal Outreach	34' 5"
Rotation Angle	359° Non-continuous
Platform Dimensions	35.4" x 27.6" x 43.3"
Max Platform Capacity	440 lbs

Dimension(L x W x H)	18' 8" x 5' 7" x 7' 3"
Overall Outrigger Footprint	13' 9" x 14' 9"
Max Towing Speed	68 mph
Weight	5,732 lbs

Power Options

Engine (diesel)	Kubota Diesel Engine
Engine (gasoline)	B&S Gasoline Engine
Electric Motor	110V / 220V AC
Battery	Lead-Acid /Lithium-ion
Manual Emergency Pump	Manual Operation

Safety Devices

- Automatic Leveling Control
- Sensor of Outrigger
- Alarm Device
- Emergency Stop Button
- Travel / Outrigger / Boom Three-Way Interlock System

Optional Devices

- 360°Continuous Rotation
- 160°Platform Rotation Angle
- Assist Drive System
- Dual-Power