



GTB60 TOWABLE BOOM LIFTS

Articulating Boom with A Telescopic



65' 7"
Max Working
Height




39' 4"
Max Horizontal
Outreach



5,732 lbs
Vehicle Weight




18' 1" x 5' 7" x 7' 3"
Dimension
(L x W x H)

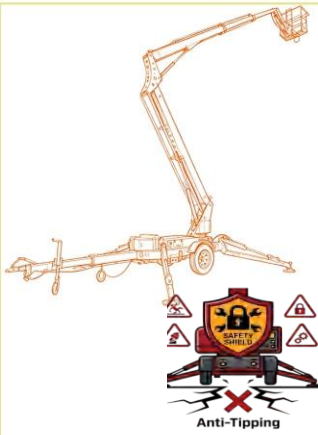

Feature

Advanced Safety:

Anti-tipping, outrigger interlocks, and overload alarms prevent rollover accidents.



Auto-Leveling:

One-touch automatic outrigger leveling maximizes jobsite setup efficiency.



Easy Towing :

Effortlessly towed by a pickup or SUV, saving you professional hauling costs and time.



Compact & Access:


Ultra-narrow stowed width fits through standard doors and tight aisles.



Dual-Power Options:

Flexible power configurations including Gasoline, Diesel, AC, and Battery.

Working Range Diagram

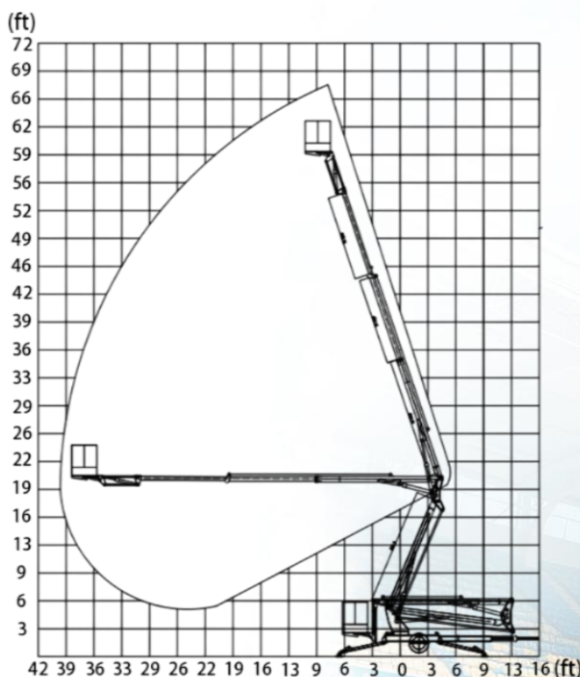

ARTICULATION

Articulating boom with a telescopic:

Excellent up-and-over clearance for navigating obstacles

Articulating Lower Boom:

Uses heavy-duty linkages to provide exceptional **up-and-over** clearance, easily bypassing fences, guardrails, and landscaping.

Telescopic Upper Boom:

Extends linearly for precise **horizontal outreach** and smooth, direct positioning to the target work area.

GTB60 Towable Boom Lift

Technical Specifications

Technical Data

Technical Parameter

Max Working Height	65' 7"
Max Platform Height	59' 1"
Max Horizontal Outreach	39' 4"
Rotation Angle	359° Non-continuous
Platform Dimensions	35.4" x 27.6" x 43.3"
Max Platform Capacity	440 lbs

Dimension(L x W x H)	18' 1" x 5' 7" x 7' 3"
Overall Outrigger Footprint	21' 4" x 22' 4"
Max Towing Speed	68 mph
Weight	7,275 lbs

Power Options

Engine (diesel)	Kubota Diesel Engine
Engine (gasoline)	B&S Gasoline Engine
Electric Motor	110V / 220V AC
Battery	Lead-Acid /Lithium-ion
Manual Emergency Pump	Manual Operation

Safety Devices

- **Automatic Leveling Control**
- **Sensor of Outrigger**
- **Alarm Device**
- **Emergency Stop Button**
- **Travel / Outrigger /Boom Three-Way Interlock System**

Optional Devices

- **360°Continuous Rotation**
- **160°Platform Rotation Angle**
- **Assist Drive System**
- **Dual-Power**